




NiTiCu SPRING	
Spring Type	Compression
$\varnothing_{\text{wire}}$	1.05 mm
ID	5.5 mm
Free Length	20 mm
Block Length	5.7 mm
Typical Force	5 – 8 N
Typical Stroke	12 – 14 mm
Typical A_s	80 – 85 °C

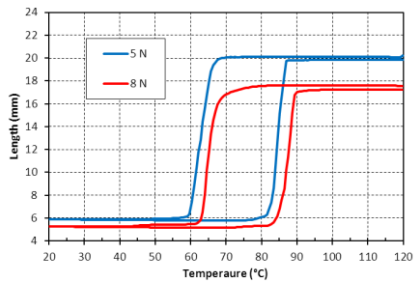

HIGH TEMPERATURE SPRING	
Spring Type	Compression
$\varnothing_{\text{wire}}$	1.50 mm
ID	10.3 mm
Free Length	26 mm
Block Length	8.6 mm
Typical Force	10 – 15 N
Typical Stroke	8 - 12 mm
Typical A_s	95 – 100 °C

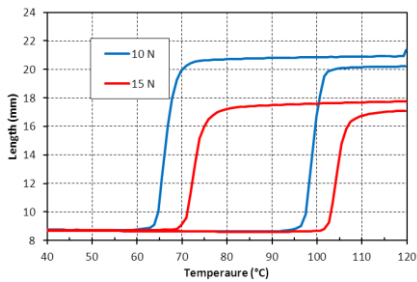

BODY TEMPERATURE SPRING	
Spring Type	Compression
$\varnothing_{\text{wire}}$	1.50 mm
ID	6.0 mm
Free Length	18 mm
Block Length	10.5 mm
Typical Force	14 – 20 N
Typical Stroke	3 mm
Typical A_s	30 – 35 °C

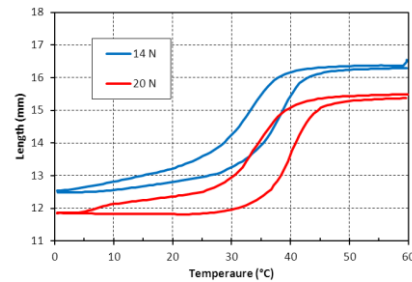

TENSILE SPRING	
Spring Type	Tension
$\varnothing_{\text{wire}}$	0.63 mm
ID	6.0 mm
Free Length	19 mm
Block Length	19 mm
Typical Force	1.5 – 2.0 N
Typical Stroke	70 - 90 mm
Typical A_s	50 - 55 °C

